



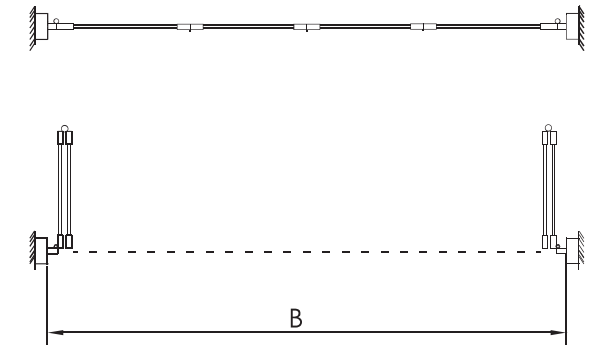

FOLDING AUTO-DOOR

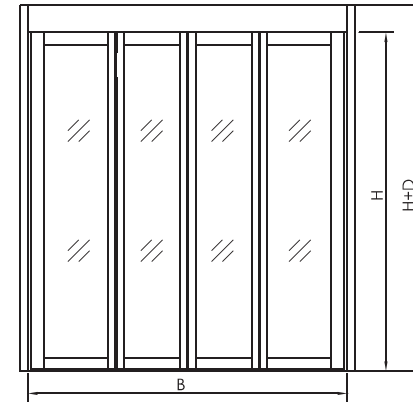

FUNCTION INTRODUCTION

Quiet, safe, smart, beautiful and hermetic, in the narrow space, the door is open in folding mode, so the narrow entrance will be widen immediately. These remarkable characteristics make it have extraordinary performance among various kinds of architectural occasions.

Smooth door body opens and closes automatically, it provides comfortable space for people to pass through, which is close to the effect of sliding door,

Folding door will not ask for storage space, in limited space it has the best door open range.

TECHNICAL DATA

Power supply: AC 220V \pm 10%,
50/60Hz
Power consumption: 100W
Opening time: 3-7S(adjustable)
Hold-open time: 1-30S(adjustable)
Max. door width: 2400(W) \times 2400(H)
Environment temperature: -20 ~
+50 $^{\circ}$ C

CONFIGURATIO

Double unit system driver
Aluminium alloy
door+tempered glass
Suitable for various sensors

