


BioSis
GUARD PATROLING SYSTEMS



TOUCH TORCH GUARD TOUR SOLUTION
PROFESSIONAL MANUFACTURER SINCE 1997



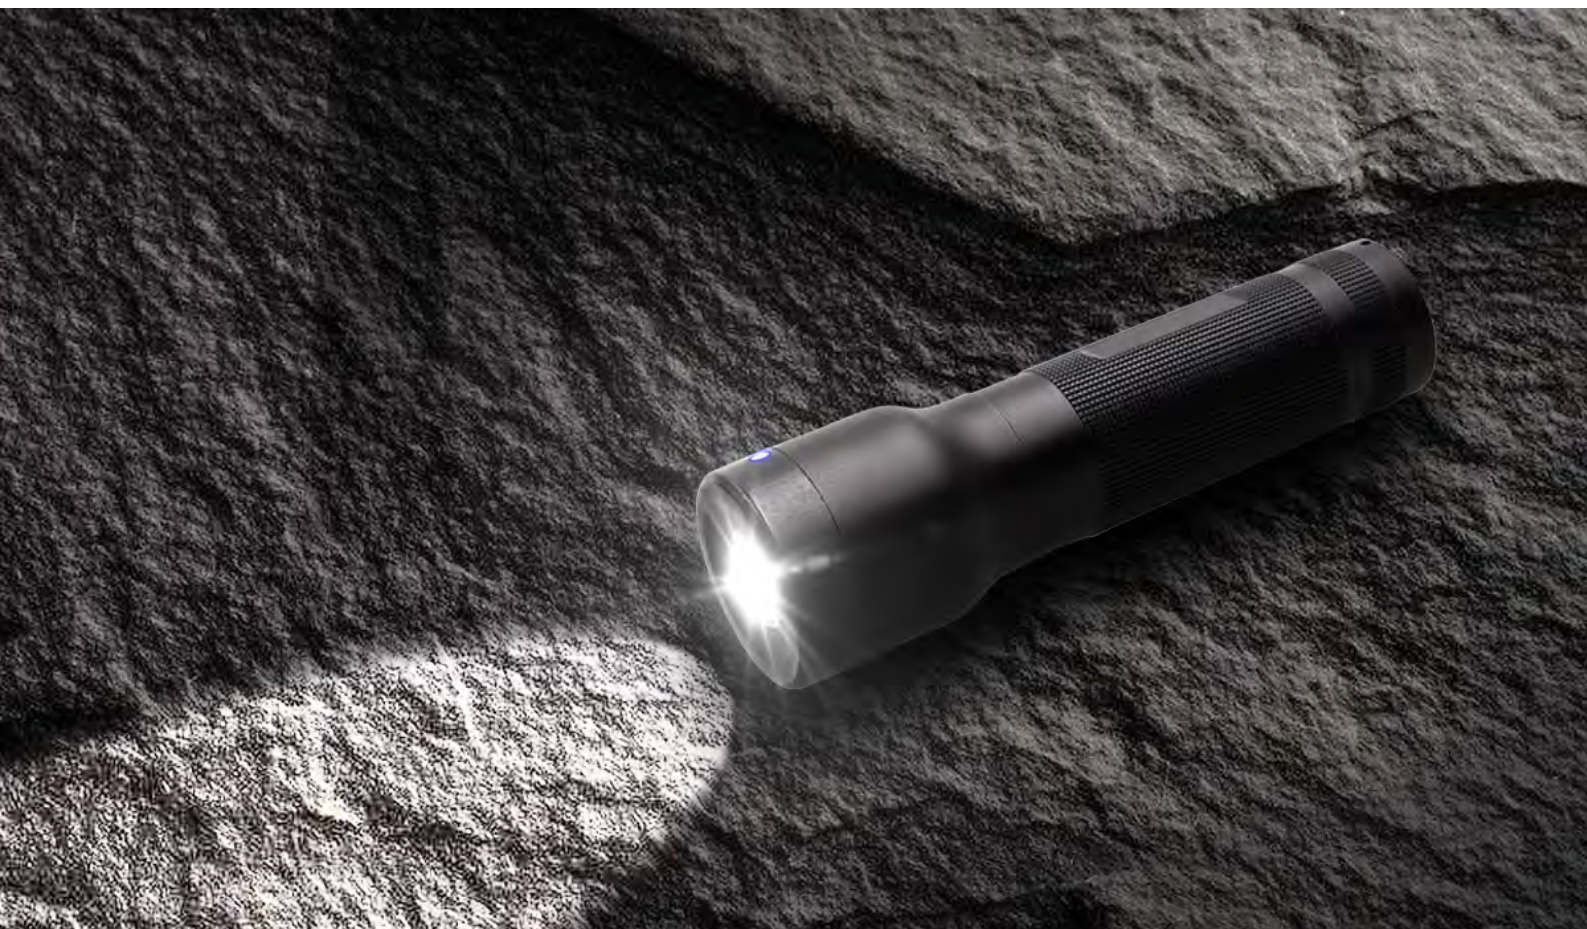

Feature



Proximity RFID reading

Featuring contactless 125kHz RFID technology, all 125kHz tags can be read



Flashlight with 5 settings

Super bright 400 lumens CREE LED, 5 modes
High/Medium/Low/Strobe/SOS



Touch switch

Control the flashlight settings sensitively with capacitive touch switch




Magnetic USB connector

Magnetic USB function allows to easily insert the connector charging and communicating without looking.


Technical Datasheet

Model	Z-6600T
Flashlight	High/Medium/Low/Strobe/SOS
Reading technology	Read 125kHz EM(ID) tags proximity
Material	Aluminum alloy
Storage	80,000 pieces
Impact record	32,000 pieces
Workable temperature	-20 to 70 °C
Workable humidity	30% to 90%
Communication	Magnetic USB cable
Battery	3.7v built-in rechargeable li-ion battery
Prompt	LED + Vibration
Standard accessories	USB cable, charger, software
Baud rate	115200 bps
Performance	IP 67, waterproof, shockproof
Dimension	130mm x φ28mm
Net weight	120g


Working Map

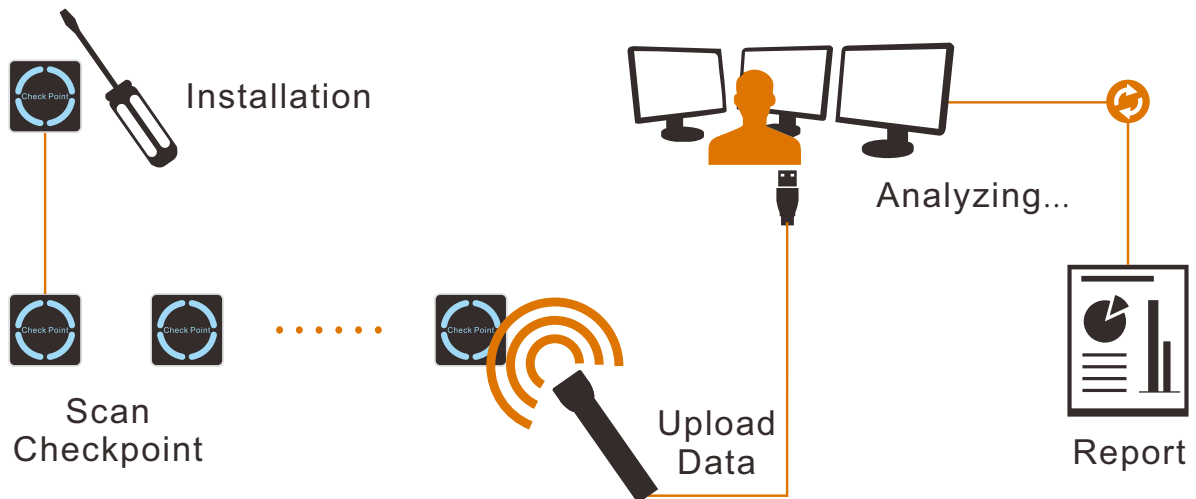

Accessories




Charger



USB cable



Software



Manual